

Edition: 11/05 - subject to change

Substitutes: ---
Status: valid


64292 XIR

■ Product description

The 64292 XIR is a tungsten halogen lamp with Xenon filling gas and IR-Coating for surgical lighting.

■ Technical data

| | | |
|--|-----------------|-----------|
| Order reference | 64292 XIR | |
| ANSI | - | |
| LIF | - | |
| Rated lamp wattage | W | 150 |
| Rated lamp voltage | V | 22.8 |
| Luminous flux | lm | 6000 |
| Color temperature | K | 3250 |
| Lamp length (overall) l | mm | max. 50 |
| Bulb diameter | mm | max. 14 |
| LCL | mm | 30 ± 0.25 |
| Type of filament | C8 | |
| Filament form | axial | |
| Filament dimensions | mm ² | 3,0 x 6,9 |
| Average service life | h | 600 |
| Decrease of lumen output after 70% of nominal lifetime | max. 15% | |
| Base | G6.35 | |

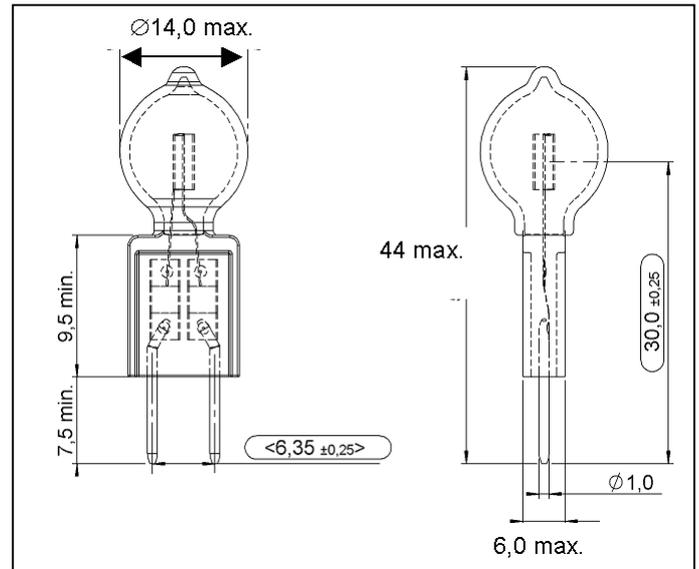

■ Lamp operation

| | | |
|---------------------------------------|--|-----|
| Maximum permissible pinch temperature | °C | 350 |
| Minimum permissible bulb temperature | °C | 250 |
| Burning position | s90 | |
| Fuse | 10.0A, quick acting, on secondary (lamp) circuit | |
| Minimum free space | defined by a cylinder around base axis with diameter 16 mm | |